


ORLOCK STAINLESS



Technical Data

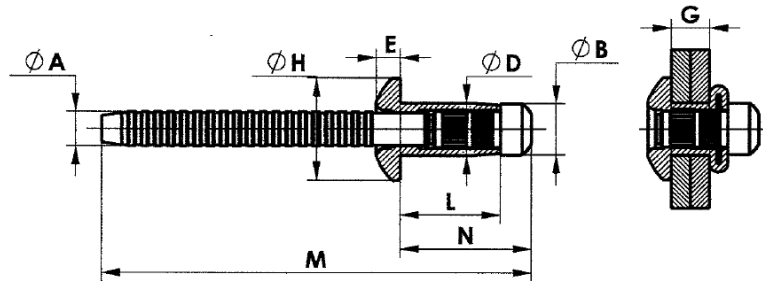

SIZE	RIVET CODE	RIVET LENGTH L +/-0.3	GRIP RANGE G	A DIA. +/-0.07	B DIA. +/-0.05	D DIA. +/-0.05	E +/-0.3	H DIA. +/-0.4	M +/-2	N +/-0.5
5/16" 7.8mm	LN78135P	13.5	4.0-7.0	5.12	7.85	7.80	3.8	16.0	56	18.5
	LN78165P	16.5	7.0-10.0						57	21.5
	LN78195P	19.5	10.0-13.0						60	24.5
	LN78225P	22.5	13.0-16.0						63	27.5

RIVET CODE	SHEAR STRENGTH, N/kgf		TENSILE STRENGTH, N/kgf	
	min.	nom.	min.	nom.
LN78135P	19130/1950	20110/2050	11770/1200	12750/1300
LN78165P	20600/2100	21580/2200		
LN78195P				
LN78225P				

BODY MATERIAL	STAINLESS STEEL AISI 304Cu WERKSTOFF No 1.4567
MANDREL MATERIAL	STAINLESS STEEL AISI 304Cu WERKSTOFF No 1.4567
RECOMMENDED HOLE SIZE	8.0-8.3 mm

ORNIT
BLIND RIVETS
Fastening Solutions

ORNIT BLIND RIVETS
Tel: +972 8 6610222, Fax: +972 8 6611380
www.ornit.com